


A

B


C

D

Revisions		
REV.	Description	DATE
A	Initial Release	14/09/11
B	Change Color	15/09/11

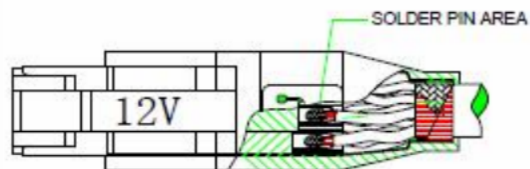


DETAIL D

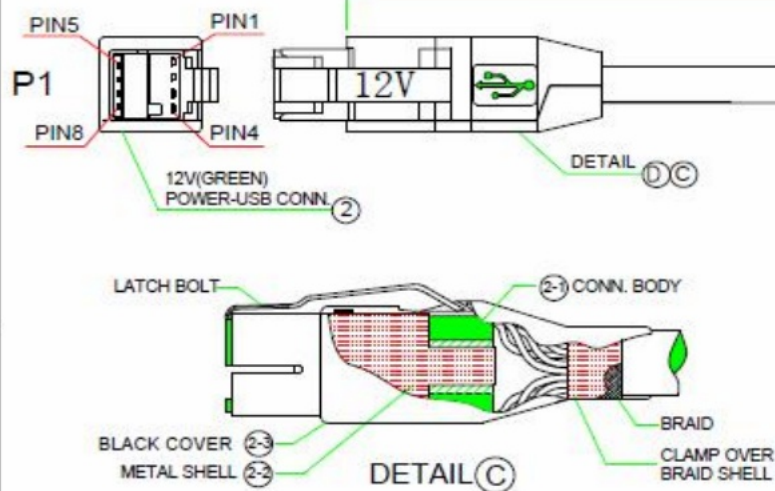

WIRE LIST

P1	SIGNAL NAME	WIRE COLOR	WIRE GAUGE	P2
8	VBUS(+5V)	RED	20	4
7	D-	WHITE	28	5
6	D+	GREEN	28	6
5	GND	BLACK	20	1
4	12VGND	BLUE	20	2
3	+12V	BROWN	20	3
N.C	+12V	N.C	N.C	—
N.C	12V GND	N.C	N.C	—
SHELL	SHIELD	—	DRAIN WIRE SHIELD	SHELL

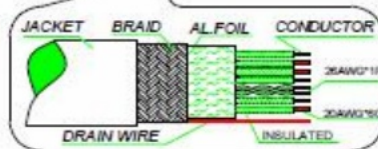

NO.	ITEM	DESCRIPTION
④	S.R APPEARANCE	PVC Shore A:85±3, UL94V-0 Color: Black.
③	2*3 SHIELDED CONN.	HOUSING:2*3Pin Pitch:2.54mm.Material:Nylon+15%GF,UL94V-0,Black Color CONTACT: Phosphor Bronze(T:0.25mm),Gold Plated 30u" METAL SHELL: Brass(T:0.25mm) Tin Plated. LATCH COVER: Material: Thermoplastic, UL94V-0,Black Color. CONN.BODY: 12Volt.Key Position 1. Contact Brass Gold Plated 30u". Insulator: Nylon 66,UL94V-0,Color Green METAL SHELL: Brass T: 0.3mm Tin Plated. BLACK COVER: ABS, UL94V-0.
②	12V(GREEN) POWER-USB CONN.	UL2725 28AWG(7/0.10T)x1P+20AWG(43/0.127T)x6C+AL Foil +Drain Wire+Braid OD:6.4mm Jacket Color Black
①	CABLE	
DWG NO	11091401-B	TITLE: Powered USB CABLE ASSY, 12VPower USB+2*3 CONN W/Overmold
DATE:	SEP.15.11	
CUSTOMER:		PartNo: 8006836
Shenzhen Hongkong Wire Cable Co Ltd		
REV.	B	UNIT: mm
SCALE:	Free	
P/N:	031032-HME	
Drawn	L. Y. J	
Checked	Alan	
Approval:		